

NILGIRI



High-Resolution Printer

One Printer - Many Applications. Barcodes, logos, carton coding and more



Reliable technology with near
zero downtime

Easy to use with minimal operator
training required

Industry's lowest running costs

Call for Demo
+91 98183 46210



Scan the code to find
more about HR Printer

Follow us -

[f /controlprintindia](#)

[in /control-print-ltd](#)

[t /controlprintltd](#)

[controlprint.com](#)

HR Printer utilizes Piezo Drop On Demand (DOD) Inkjet Technology

With only a few moving parts in the system, the odds of printer failure are minimized.



The Control Print NILGIRI is a High Resolution Printer based on the Piezo Drop on Demand Inkjet Technology. Using Oil based inks, this printer is especially suitable for a variety of variable (including linear and data matrix) barcodes, graphics & logos, real time information and text.

It is suitable for printing across all varieties of corrugated and kraft shipper cartons and also used extensively in the Wood and Construction material industry. The HR Printer can be easily integrated across a wide gamut of end-of-line packaging applications and for printing on all porous materials.

Reliability



- ✓ 17.8 mm or 71.6 mm print heights
- ✓ Excellent print quality & barcode scan ability with a high native resolution
- ✓ Highly reliable Piezo Drop on Demand Inkjet Technology
- ✓ Automatic purging and priming for zero maintenance and maximum reliability
- ✓ Simple, intuitive icon-based touch interface
- ✓ Minimal user training required
- ✓ Horizontal and Vertical print orientation options
- ✓ Large variety of print options including Linear and Data matrix Barcodes, QR codes, Text, Graphics & Logos, Real time and Sequential Numbering
- ✓ High contrast oil-based ink suitable for all porous substrates & non porous substrates

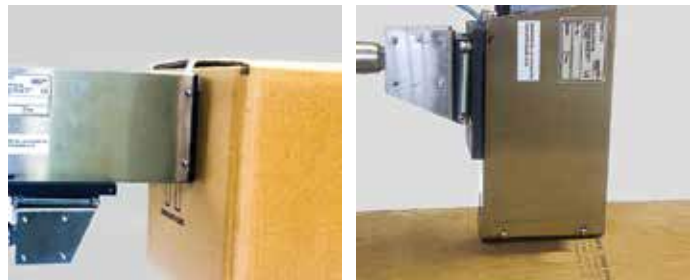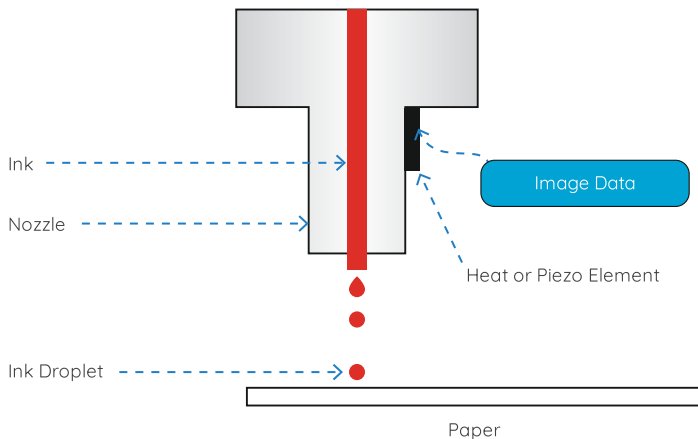

Print Quality & Features

- ✓ Piezo DOD printhead have a high native resolution consisting of 128 individual nozzles in a 17.8 mm print swathe. The HR controller fires each individual nozzle to eject small droplets of ink to form the required characters as per the print message.

The combination of a long-lasting piezo DOD printhead, Oil or Solvent based inks which do not dry within the printhead, and automatic purging & priming, leads to unsurpassed reliability on the production line. The simplicity of the technology and the user interface ensures no dependency on trained manpower for operation or support.

- ✓ High quality 180dpi (dots per inch) maximum print resolution
- ✓ 17.8 mm prints swathe per printhead with 128 independent nozzles; 71.6 mm printhead option with 510 independent nozzles
- ✓ Standard printing functions include QR codes, linear barcodes, data matrix barcodes, automatic date & time functions, numbering, graphics, logos
- ✓ Horizontal and vertical orientation possibility
- ✓ Various Customized CMYK coloured inks available
- ✓ Storage of up to 200 Messages, 1,000 logos

Simple, Intuitive Operation

- ☑ Large 12-inch user friendly, solvent resistant industrial touchscreen display with easy to use, icon based, WYSIWYG graphical interface
- ☑ Embedded Windows Software provides a familiar feel and ensures minimal user training
- ☑ User profile manager with multiple levels of access
- ☑ Minimal specialized support required for operation & maintenance
- ☑ Window based system ensures smooth and quick start up and shutdown procedures
- ☑ Logo can be prepared on a computer and transferred to the printer via a USB. No extra software or application required for logo formatting

Technical Specification

Product range	NILGIRI PRINTER FLEX 508 GS	NILGIRI PRINTER FLEX 510	NILGIRI PRINTER FLEX 508 GS (UV)	NILGIRI PRINTER FLEX 128	NILGIRI PRINTER G-128 RF	NILGIRI PRINTER G-128 UVR
DIMENSIONS AND CONNECTED LOADS						
Housing Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Protection Class	IP 54	IP 54	IP 54	IP 54	IP 54	IP 54
Dimensions of Unit (H x W x D)	322 x 250 x 140 mm	322 x 250 x 140 mm	322 x 250 x 140 mm	322 x 250 x 140 mm	322 x 250 x 140 mm	322 x 250 x 140 mm
Screen	12" LCD Touch Screen	12" LCD Touch Screen	12" LCD Touch Screen	12" LCD Touch Screen	12" LCD Touch Screen	12" LCD Touch Screen
Weight	7 Kgs	7 Kgs	7 Kgs	7 Kgs	7 Kgs	7 Kgs
Electrical Requirement	120-240 V (+/- 10%)	120-240 V (+/- 10%)	120-240 V (+/- 10%)	120-240 V (+/- 10%)	120-240 V (+/- 10%)	120-240 V (+/- 10%)
	50/60 Hz;6A	50/60 Hz;6A	50/60 Hz;6A	50/60 Hz;6A	50/60 Hz;6A	50/60 Hz;6A
Operating Temperature	10-50 degrees C	10-50 degrees C	10-50 degrees C	10-50 degrees C	10-50 degrees C	10-50 degrees C
Compressed Air Required	No	No	No	No	No	No
HARDWARE						
Number of PrintHeads	1-2 (Standard), 8 (Optional)	1-2 (Standard), 8 (Optional)	1-2 (Standard), 8 (Optional)	1-2 (Standard), 8 (Optional)	1-2 (Standard), 8 (Optional)	1-2 (Standard), 8 (Optional)
Interface	10/100 MBit Ethernet, Broadcom BCM54610	10/100 MBit Ethernet, Broadcom BCM54611	10/100 MBit Ethernet, Broadcom BCM54612	10/100 MBit Ethernet, Broadcom BCM54613	10/100 MBit Ethernet, Broadcom BCM54614	10/100 MBit Ethernet, Broadcom BCM54615
	/ VNC Server	/ VNC Server	/ VNC Server	/ VNC Server	/ VNC Server	/ VNC Server
Serial Interface	RS232 & RS485	RS232 & RS485	RS232 & RS485	RS232 & RS485	RS232 & RS485	RS232 & RS485
Alarm Output	Yes (Selectable)	Yes (Selectable)	Yes (Selectable)	Yes (Selectable)	Yes (Selectable)	Yes (Selectable)
Processor	AMD® Embedded G-Series T56N (2x 1.65 GHz), T40E (2x 1.0 GHz), T52R (1.5 GHz)	AMD® Embedded G-Series T56N (2x 1.65 GHz), T40E (2x 1.0 GHz), T52R (1.5 GHz)	AMD® Embedded G-Series T56N (2x 1.65 GHz), T40E (2x 1.0 GHz), T52R (1.5 GHz)	AMD® Embedded G-Series T56N (2x 1.65 GHz), T40E (2x 1.0 GHz), T52R (1.5 GHz)	AMD® Embedded G-Series T56N (2x 1.65 GHz), T40E (2x 1.0 GHz), T52R (1.5 GHz)	AMD® Embedded G-Series T56N (2x 1.65 GHz), T40E (2x 1.0 GHz), T52R (1.5 GHz)
USB	USB2.0 (02 ports)	USB2.0 (02 ports)	USB2.0 (02 ports)	USB2.0 (02 ports)	USB2.0 (02 ports)	USB2.0 (02 ports)
PS/2	Port for Mouse and Keyboard	Port for Mouse and Keyboard	Port for Mouse and Keyboard	Port for Mouse and Keyboard	Port for Mouse and Keyboard	Port for Mouse and Keyboard
BCD Port (Remote message selection)	5 PNP / NPN inputs	5 PNP / NPN inputs	5 PNP / NPN inputs	5 PNP / NPN inputs	5 PNP / NPN inputs	5 PNP / NPN inputs
Encoder	PNP / NPN	PNP / NPN	PNP / NPN	PNP / NPN	PNP / NPN	PNP / NPN
Product Sensor	1 (option of 2) PNP / NPN	1 (option of 2) PNP / NPN	1 (option of 2) PNP / NPN	1 (option of 2) PNP / NPN	1 (option of 2) PNP / NPN	1 (option of 2) PNP / NPN
PRINTING CAPABILITY						
Print Resolution	180 DPI	180 DPI	180 DPI	180 DPI	180 DPI	180 DPI
Print Swathe	72 mm	72 mm	72 mm	17 mm	17 mm	17 mm
Drop Volume	12pl-72 pl	80 pl	12pl-72 pl	80 pl	80 pl	80 pl
Printhead Type	Grey Scale	Binary	Grey Scale	Binary	Binary	Binary
Supported Inks	Oil based	Oil based	UV, Solvent based	Oil based	Oil based	UV, Solvent based

Uptime & Maintenance

- ☑ No printhead cleaning, filter replacements, or other maintenance requirements
- ☑ Automatic purging and priming with full ink recuperation ensures no ink wastage
- ☑ High ink tank capacity ensures infrequent refills
- ☑ Piezo drop-on-demand inkjet technology provides a long lasting printhead life
- ☑ No start-up/shutdown or long shutdown procedures to follow


Flexibility, Communication, & Integration

- ☑ Easy to setup and integrate on almost any packaging production line
- ☑ Compact footprint
- ☑ Fully controllable through any Windows based PC for remote control of printers
- ☑ In the dual head variant, different messages can be printed in each head using a common sensor

The Nilgiri Mountains

The Nilgiri Mountains form part of the Western Ghats in western Tamil Nadu, India. At least 24 of the Nilgiri Mountains' peaks are above 2,000 metres, the highest peak being Doddabetta, at 2,637 metres. The Nilgiri Hills are separated from the Karnataka Plateau to the north by the Moyar River.

Three national parks border portions of the Nilgiri mountains. Mudumalai National Park lies in the northern part of the range where Kerala, Karnataka, and Tamil Nadu meet, covering an area of 321 km². Mukurthi National Park lies in the southwest part of the range, in Kerala, covering an area of 78.5 km², which includes intact Shola-grassland mosaic, habitat for the Nilgiri Tahr. Silent Valley National Park lies just to the south and contiguous with those two parks, covering an area of 89.52 km².

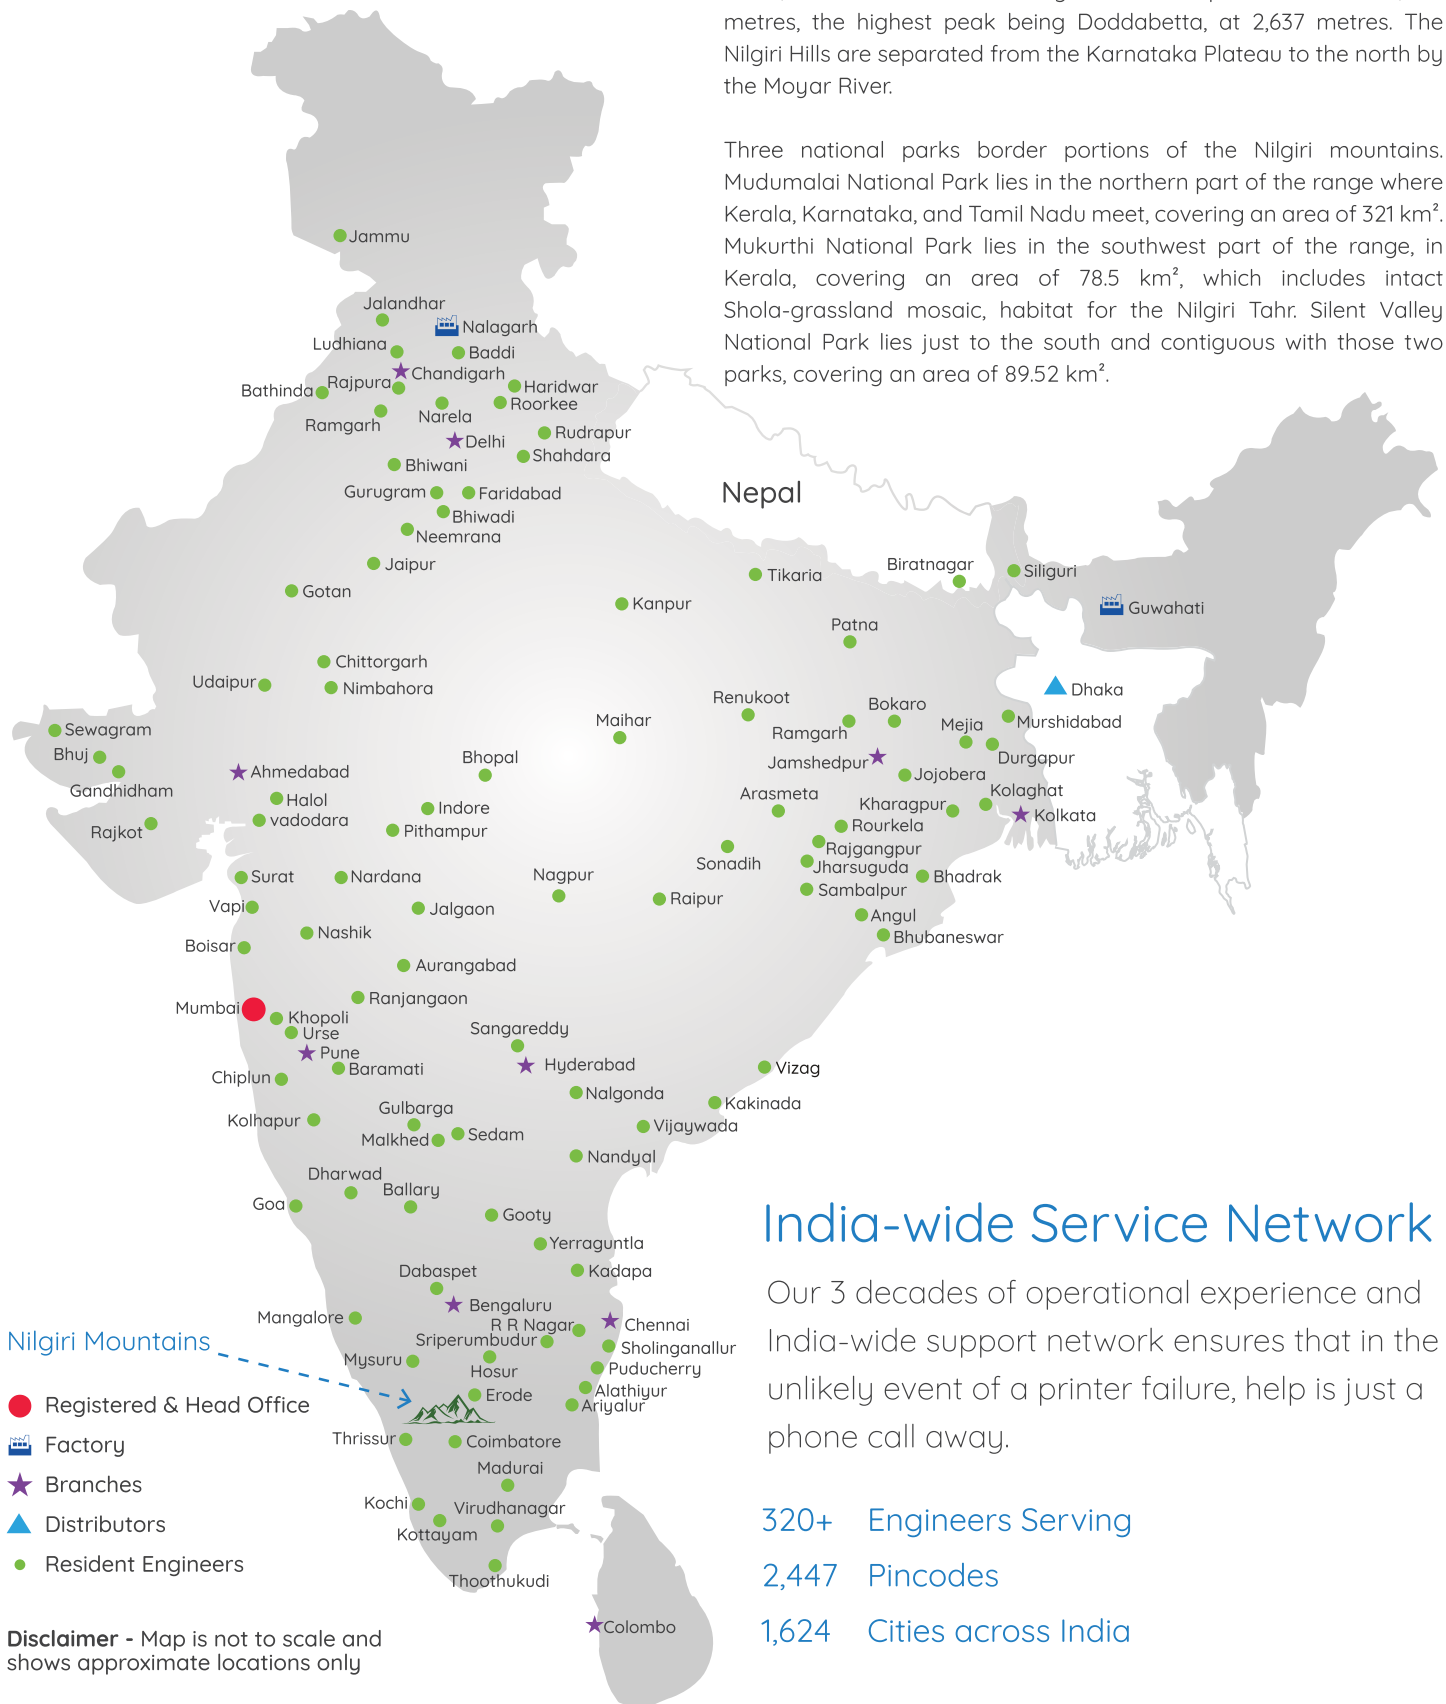

India-wide Service Network

Our 3 decades of operational experience and India-wide support network ensures that in the unlikely event of a printer failure, help is just a phone call away.

320+ Engineers Serving

2,447 Pincodes

1,624 Cities across India



C-106, Hind Saurashtra Industrial Estate, Andheri-Kurla Road, Marol Naka, Andheri (East), Mumbai 400 059
 ☎ +91 22 2859 9065 / 6693 8900 | ✉ marketing@controlprint.com | 🌐 www.controlprint.com

AHMEDABAD | BENGALURU | CHANDIGARH | CHENNAI | COLOMBO | DELHI | GUWAHATI | HYDERABAD
 JAMSHEDPUR | KERALA | KOLKATA | MUMBAI | NEPAL | PUNE

Control Print's policy is one of continued product improvement. We reserve the right to alter design and/or specifications without notice. | © 2021 Control Print Limited | All rights reserved.